



# Kuraray Poval™ & Exceval™ – Temporary Binder for Ceramics

**kuraray**

**Kuraray Poval™**

# Temporary Binder for Ceramics



Kuraray Poval™ is used extensively across many ceramics applications ranging from tiles and pottery to ferrite as a temporary binder of ceramic particles. Kuraray Poval™ improves the mechanical green strength of green ceramic bodies so they can pass through the production process easily before sintering without breakage. Kuraray offers “low ash” products to prevent residues after sintering. Decomposition of Kuraray Poval™ proceeds slowly compared with other known binders which helps to prevent sudden generation of decomposition gas.

## Kuraray Poval™ – Low Ash grades

Grade name	Viscosity <sup>1)</sup> [mPa•s]	Degree of hydrolysis [mol%]	Non-volatile content [%]	Ash <sup>2)</sup> content [%]	pH
Kuraray Poval™ 5-74 LLA	4.6 - 5.4	72.5 - 74.5	97.5 ± 2.5	≤ 0.1	5.0 - 7.0
Kuraray Poval™ 4-88 LA	3.4 - 4.5	86.7 - 88.7	97.5 ± 2.5	≤ 0.09	4.5 - 7.0
Kuraray Poval™ 8-88 LA	7.0 - 9.0	86.7 - 88.7	97.5 ± 2.5	≤ 0.09	4.5 - 7.0
Kuraray Poval™ 4-98 LA	4.0 - 5.0	98.0 - 98.8	97.5 ± 2.5	≤ 0.09	4.5 - 7.0
Kuraray Poval™ 20-98 LA	18.5 - 21.5	98.0 - 98.8	97.5 ± 2.5	≤ 0.09	4.5 - 7.0
Kuraray Poval™ 56-98 LA	52.0 - 60.0	98.0 - 98.8	97.5 ± 2.5	≤ 0.09	4.5 - 7.0
Kuraray Poval™ 28-99 LA	26.0 - 30.0	99.0 - 99.8	97.5 ± 2.5	≤ 0.09	4.5 - 7.0

1) of a 4 % aqueous solution at 20 °C DIN 53015 / JIS K 6726

2) calculated as Na<sub>2</sub>O



## Exceval™ for better green strength

Hydrophobically modified polyvinyl alcohol, Exceval™, provides the following advantages when used as a binder of ferrite bodies.

- ✓ Increased green strength
- ✓ Improved moldability
- ✓ Less crack after sintering which result in yield improvement




### Exceval™ grades for ceramics binder

Grade name	Viscosity <sup>1)</sup> [mPa•s]	Degree of hydrolysis [mol%]	Non-volatile content [%]	Ash <sup>2)</sup> content [%]	pH
Exceval™ RS-2117	25.0 - 30.0	97.5 - 99.0	97.5 ± 2.5	≤ 0.4	5.0 - 7.0
Exceval™ AQ-4104	3.6 - 4.4	98.0 - 99.0	97.5 ± 2.5	≤ 0.4	5.0 - 7.0


1) of a 4 % aqueous solution at 20 °C DIN 53015 / JIS K 6726

2) calculated as Na<sub>2</sub>O

Exceval™ contains a special hydrophobic group which enables a larger amount to be adsorbed on ferrite particles compared with conventional polyvinyl alcohols as shown in Fig.1. Such ferrite particles combined with Exceval™/Kuraray Poval™ are usually spray dried and then moulded by dry press techniques. Due to the higher adsorption of Exceval™ the system provides more uniform particles which results in better flowability. This better flow is proven by lower angle of repose as shown in Fig.2. (Repose is the steepest angle of descent from the horizontal plane to which a material can be piled without slumping). Better flow of the ferrite body is a strong advantage in providing better distribution of the particles within the mould in the dry press process. This allows pressure to be uniformly applied to the mould preventing cracking after sintering and thus improves the yield of the production process.

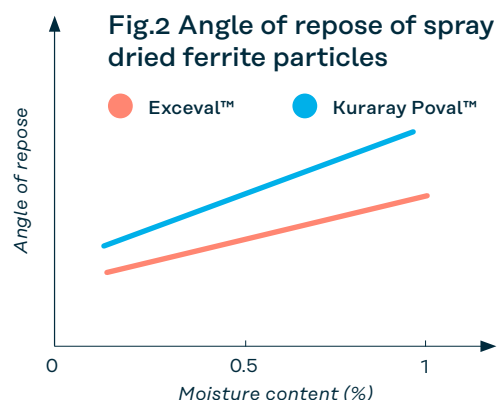

**Fig. 1 Adsorption of Exceval™ on ferrite particles**

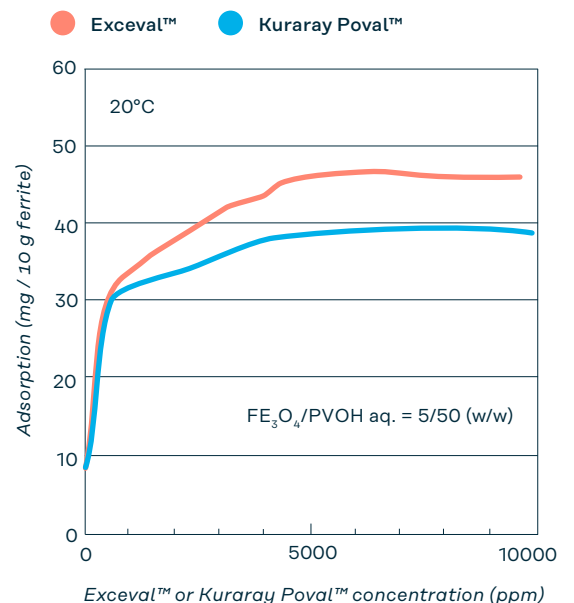

# Adding value to your products – worldwide

KURARAY POVAL™, EXCEVAL™, ELVANOL™, and MOWIFLEX™ are the trademarks for polyvinyl alcohols (PVOH) made by Kuraray. Their key characteristics — outstanding film-forming properties and high binding strength — add real value to your products. Our polymers are water-soluble, highly reactive, crosslinkable and foamable. They have high pigment binding capacity, protective colloid characteristics and thickening effects. The physical and chemical properties of KURARAY POVAL™ make it ideal for a wide variety of applications, ranging from adhesives through paper and ceramics to packaging films. Many of our polymers are food contact-approved and thus suitable for food applications.

Kuraray produces its wide range of KURARAY POVAL™ grades in Japan, Singapore, Germany and the USA. Kuraray's global production and service network make us your partner of choice for innovative high-quality PVOH resins.



**Kuraray Poval™**

PLEASE CONTACT US  
*[kuraray-poval.com](http://kuraray-poval.com)*

***kuraray***

## HEADQUARTERS

### **Kuraray Co., Ltd.**

Tokiwabashi Tower  
2-6-4, Otemachi  
Chiyoda-ku  
Tokyo, Japan 100-0004

### **Kuraray America, Inc.**

3700 Bay Area Blvd.,  
Suite 680 Houston, TX 77058  
United States of America

### **Kuraray Asia Pacific Pte., Ltd.**

1 North Buona Vista Link  
#12-10/11, Elementum  
Singapore 139691

### **Kuraray Europe GmbH**

Philipp-Reis-Str. 4  
65795 Hattersheim am Main,  
Germany

### **Kuraray China Co., Ltd.**

Unit 2207, 2 Grand Gateway  
3 Hongqiao Road, Xuhui District, Shanghai  
200030, China

## DISCLAIMER

KURARAY POVAL™, EXCEVAL™, ELVANOL™, and MOWIFLEX™ are the trademarks or registered trademarks of Kuraray or its affiliated companies. The information, recommendations, and details in this document are provided based on sufficient consideration to the best of Kuraray's knowledge. However, they are not intended to guarantee any characteristics beyond the product specifications. Customers should verify the suitability of our products for their intended use and compliance with relevant laws and regulations. Neither Kuraray nor any of its affiliated companies makes any warranty or responsibility for any errors, inaccuracies, or omissions in this document.