

ELVANOL® 71-30

POLYVINYL ALCOHOL

DESCRIPTION

Elvanol® 71-30 is a medium viscosity, fully hydrolyzed grade of polyvinyl alcohol. White and granular, it is soluble in hot water but insoluble in cold water and common organic solvents. For most applications, Elvanol® 71-30 is prepared in water solutions. On evaporation of water, transparent films are formed which have high tensile strength and tear resistance. The binder characteristics of Elvanol® offer excellent adhesion to porous, hydrophilic surfaces.

Typical Properties of Elvanol® 71-30

Viscosity, cps ¹	27.0 - 33.0
Solution, pH	5.0-7.0
Volatiles, wt. % max.	5.0
Ash, wt. % max. ³	0.70

¹ Viscosity in mPa.s (cP) of a 4% solids aqueous solution at 20°C (68°F)

² Mole percent hydrolysis of acetate groups, dry basis

³ Dry basis, calculated as % Na₂O

SUGGESTED USES

Elvanol®71-30 offers a combination of excellent film forming and binder characteristics, along with insolubility in cold water and organic solvents. This combination of characteristics is useful in a variety of applications. Elvanol® 71-30 is widely used in the paper industry at the size press and calender stack, and in adhesives tackified with boric acid.

ADHESIVES

In adhesive applications Elvanol®71-30 can be used alone or often in combination with extenders such as starch, dextrin or clay. As the proportion of Elvanol® increases, the adhesive strength and water resistance also improve. Examples of Elvanol® adhesives applications include:

- for paper and paperboard, alone or in combination with other additives;
- as a component in industrial adhesives for bonding paper, textiles, leather, films and porous substrates;
- for laminating adhesives which are used in the manufacture of solid fiberboard, linear board, spiral wound tubes and cores, and laminated specialties;
- in bag adhesives and pastes; and
- as an adhesive in corrugated container board.

The medium viscosity gives flexibility in formulating water based adhesives with boric acid with or without clay and/or starch.

PAPER AND PAPERBOARD SIZING AND COATINGS

In sizing and coatings for paper and paperboard, Elvanol® 71-30 can be used alone or combined with starch and/or pigment. The proportion of Elvanol® to be used depends on desired physical properties and economics. Some specific paper uses include:

- For fine writing and printing papers as surface size material with starch;
- as grease-proof coating or release coating on paper specialties; and
- as binder in pigmented size press coatings to provide pigment loading.
- When substituted for all or part of the starch, the lower binder add-on improves opacity and makes the paper less yellow.
- Elvanol® 71-30 is easily jet-cooked alone or with starch with no additional holding time required after cooking.
- Elvanol® 71-30 has found wide use as a calender stack treatment for controlling curl and linting for paperboard grades.
- Elvanol® 71-30 is a good choice as a carrier for grease and oil-resistant treatments applied at the size press or calender stack.

ELVANOL® 71-30

POLYVINYL ALCOHOL

FILMS

Unsupported films cast from water solutions of Elvanol® 71-30 and plasticizers are transparent, tough, tear-resistant and punctureresistant. Elvanol® provides a unique combination of properties. Films have hot water solubility, in addition to resistance to oils, grease and solvents, and have low oxygen and water vapor transmission rates. These properties make films of Elvanol® 71-30 suitable for dissolvable unit packages and hospital laundry bags where hot water solubility and cold water resistance is needed.

FDA STATUS


Elvanol® 71-30 polyvinyl alcohol complies with U.S. Food and Drug Administration (FDA) Regulations under the following Sections of Title 21 CFR, and may be used in contact with food, subject to the limitations and requirements therein:

- 175.105 - Adhesives
- 175.300 - Resinous and polymeric coatings ⁽¹⁾
- 175.320 - Resinous and polymeric coatings for polyolefin films ⁽²⁾
- 176.170(b) - Components of paper and paperboard in contact with aqueous and fatty foods ⁽³⁾
- 176.180 - Components of paper and paperboard in contact with dry food ⁽⁴⁾
- 177.1200 - Cellophane
- 177.1670 - Polyvinyl alcohol film ⁽⁵⁾
- 177.2260 - Filters, resin-bonded ⁽⁶⁾
- 177.2800 - Textiles and textile fibers ⁽⁷⁾


(1) Subject to the finished food-contact article meeting the extractive limitations under the intended conditions of use, as shown in paragraph (c).

(2) For use only as a dispersing agent at levels not to exceed 6 percent of total coating weight in coatings for polyolefin films provided the finished polyolefin films contact food only of Types V, VII and IX (identified in 21 CFR 176.170(c), Table 1), subject to the finished food-contact article meeting the extractive limitations under the intended conditions of use, as shown in paragraph (c).

EFFECTS OF CONCENTRATION ON VISCOSITY OF ELVANOL® 71-30

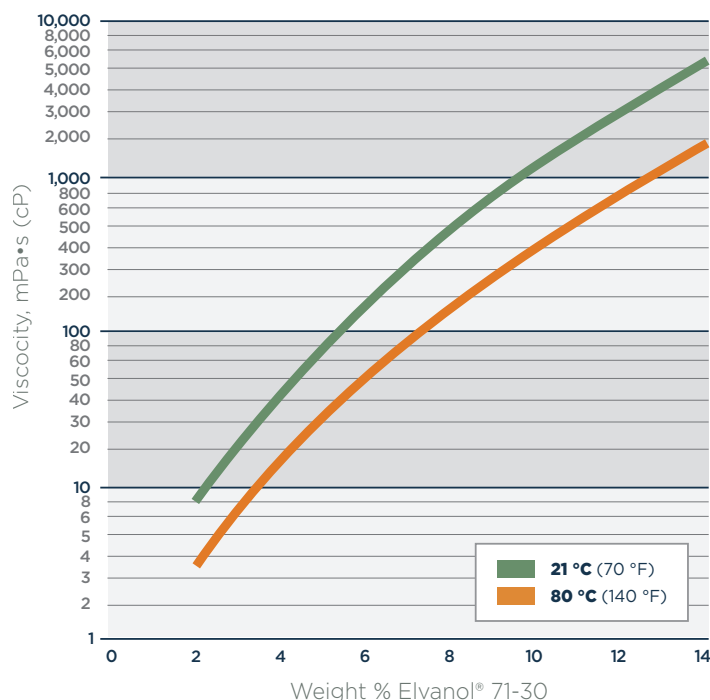

EFFECTS OF TEMPERATURE ON VISCOSITY OF ELVANOL® 71-30

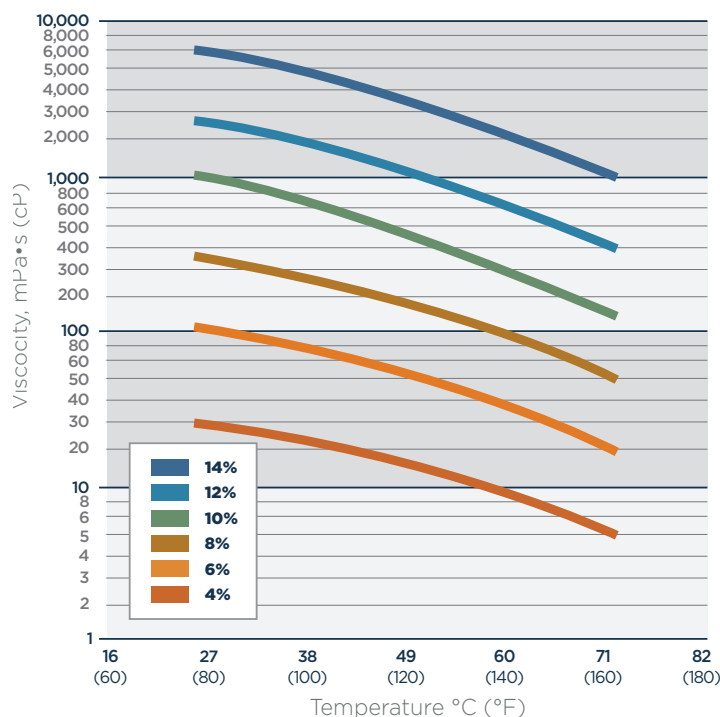

ELVANOL® 71-30 POLYVINYL ALCOHOL

FDA STATUS (CONTINUED)

(3) Subject to the finished food-contact surface of the paper or paperboard meeting the extractive limitations under the intended conditions of use, as shown in paragraph (c) of the Regulation.

(4) As a component of the uncoated and coated food-contact surface of paper and paperboard in contact with dry food (Food Type VIII, identified in 21 CFR 176.170(c), Table 1).

(5) In the preparation of polyvinyl alcohol film that may be used in contact with food of Types V, VIII and IX (identified in 21 CFR 176.170(c), Table 1), provided the food-contact film in contact with food Types V or IX is subject to the finished food-contact surface of the paper or paperboard meeting the extractive limitations under the intended conditions of use, as shown in paragraph (b) of the Regulation. The finished food-contact film shall not be used as a component of food containers intended for use in contact with water.

(6) Subject to the finished resin-bonded filter meeting the extractive limitations under the intended conditions of use, as shown in the Regulation. In accordance with good manufacturing practice, finished filters should be thoroughly cleansed prior to their first use in contact with food.

(7) For use in textiles and textile fibers that may be used as articles or components of articles in contact with dry food (Food Type VIII, identified in 21 CFR 176.170(c), Table 1).

SAFETY & HANDLING

Read and understand the Materials Safety Data Sheet (MSDS) before using this product. Elvanol® 71-30 is technical quality polyvinyl alcohol. It is not recommended for inclusion in any food or preparation that might be taken internally.

Under certain conditions of use, dust may be formed from Elvanol® polyvinyl alcohol. Kuraray recommends that dust from Elvanol® be treated

as a nuisance dust, which is regulated by the Occupational Safety and Health Administration (OSHA) under Title 29, Code of Federal Regulations, Section 1910.1000. Under this section, an employee's exposure to nuisance dust shall be limited to 15 milligrams per cubic meter (mg/m³) of total dust and 5 mg/m³ of respirable dust on a time-weighted average in any 8-hour shift of a 40-hour week.

The Kuraray limit for polyvinyl alcohol exposure to nuisance dust is 10 mg/m³, and for respirable dust is 5 mg/m³. If excessive concentrations of dust are encountered, a mask or respirator and goggles should be worn. The mask or respirator should comply with Section 1910.134 of the OSHA regulations; the goggles should comply with Section 1910.133.

For bulk storage and handling of Elvanol® (e.g. storage silos) refer to Elvanol® Bulk Storage and Handling Safety Guide.

Elvanol® may be disposed of by incineration or landfill. However, any disposal method must be in compliance with all applicable local, state and federal regulations.

AMERICAS

Kuraray America, Inc.

2625 Bay Area Blvd., Ste 600
Houston, TX 77058 USA
Tel: (800) 423-9762
Fax: (281) 283-1722

Kuraray South America Ltda.

Al. Campinas, 977 - 5º andar,
sala 51 - CEP 01404-001 -
Jd. Paulista - São Paulo -
SP - Brasil
Tel: +55-11-2615-3531
Fax: +55-11-2615-3529

www.kuraray.us.com

ASIA

Kuraray Co., Ltd.

Ote Center Building, 1-1-3,
Otemachi, Chiyoda-ku,
Tokyo 100-8115, Japan
Tel: +81-3-6701-1000
Fax: +81-3-6701-1005

EUROPE

Kuraray Europe GmbH

Philipp-Reis-Straße 4
D-65795 Hattersheim am
Main Germany
Tel: +49-69-305-85300
Fax: +49-69-305-85399

Copyright © 2015 Kuraray. All rights reserved. The technical data herein are guides to the use of Kuraray resins. The advice contained herein is based upon tests and information believed to be reliable, but users should not rely upon it absolutely for specific applications because performance properties will vary from lot to lot and with processing conditions. It is given and accepted at user's risk and confirmation of its validity and suitability in particular cases should be obtained independently. The Kuraray makes no guarantees of results and assumes no obligations or liability in connection with its advice.

This publication is not to be taken as a license to operate under, or recommendation to infringe, any patents. CAUTION: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, see Kuraray Medical Caution Statement, H-50102.